


## SPECIFICATIONS

### MATERIAL

The B-1-L, 6" bollard shall be fabricated with 5" sch. 40 steel pipe (5.56" OD), fully welded to 2 ea. 2" and 1 ea. 3" wide decorative collars (6.62" OD) and a schedule 40 weld cap. Surface mount bollards shall be fully welded to a 5/8" x 10-1/4" steel flange with 5/8" holes for 1/2" anchor bolts. **Anchor bolts by others.**

### LIGHTS

6 each 4" LED Bright White lights  
AC input: 100-277 Vac, 50/60Hz. 20 watt.  
Complies with UL 2108, CSA C22.2 No. 250, Listing #E112419.

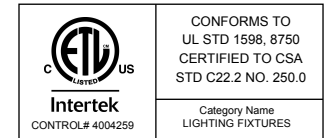

### HARDWARE

Bollard top shall be attached to base with 3 stainless steel tamper resistant bolts.

### PROTECTIVE COATING

**Powder Coating:** Following fabrication bollards shall be cleaned and treated with a 7 stage iron phosphate process. Following pretreatment, the lighted bollards are coated inside and out with a corrosion resistant epoxy powder primer followed by a polyester or polyester TGIC topcoat on the outside of the bollard. The coating shall be a minimum of 4 mils thick on all surfaces.

**Note:** Unless otherwise specified, bollards shall be powder coated a standard FairWeather color.

**Options:** Sch. 80 pipe


**Height:** 36" or 42"

**Mounting:** Surface mount or cast in place

**Lighting:** Available in Brite White, for colors ask sales representative

**Note for cast in place:** Depth and diameter of installation hole may vary with soil conditions. Consult project engineer for correct dimensions.

REV 12-09-15

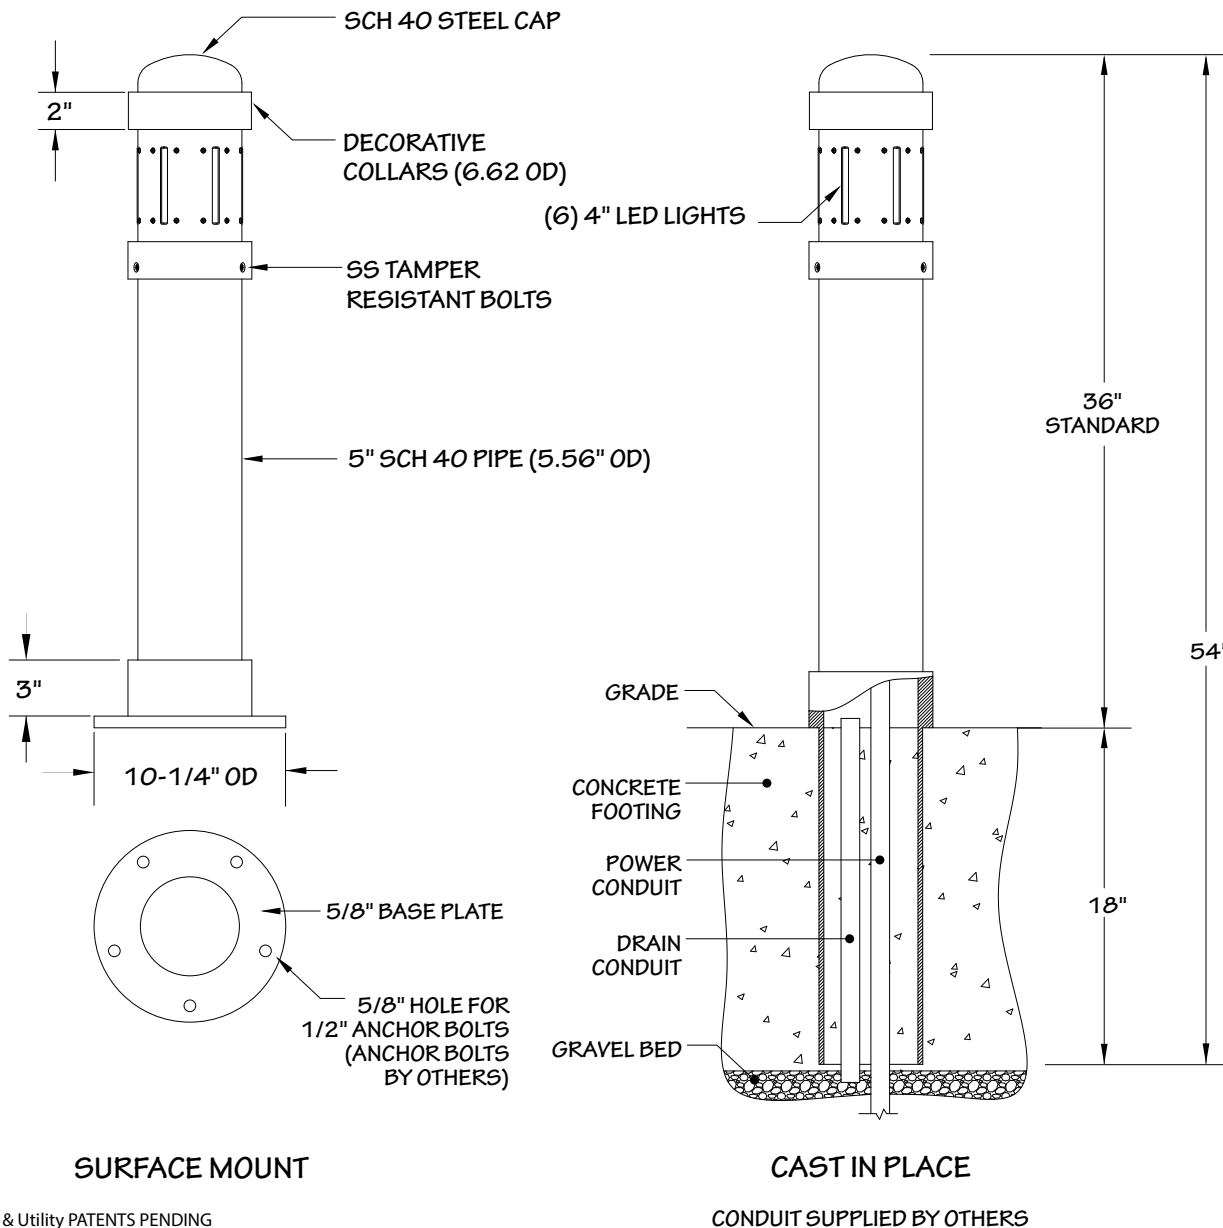

Design & Utility PATENTS PENDING  
2004-2005 All Rights Reserved Worldwide -LEADER®

## Model B-1-L 6" x 36" LED Lighted Bollards

## FairWeather Site Furnishings

360-895-2626 or Toll Free 800-323-1798  
Port Orchard, Washington

©1999-2015 Leader International Corporation, FairWeather Site Furnishings division  
Notice: These products are proprietary. Numerous designs are patented or patent pending under Leader Manufacturing, Inc.